



How to update EDID under Windows

Step 1. Run Nuvoton eSIO Utility Ver:0.78 under Windows.



Step 2. Flash DP EDID.

- 2-1 Choose DP_EDID option
- 2-2 Choose correct DP bin file from your computer
- 2-3 Click the Execute button to flash the EDID.

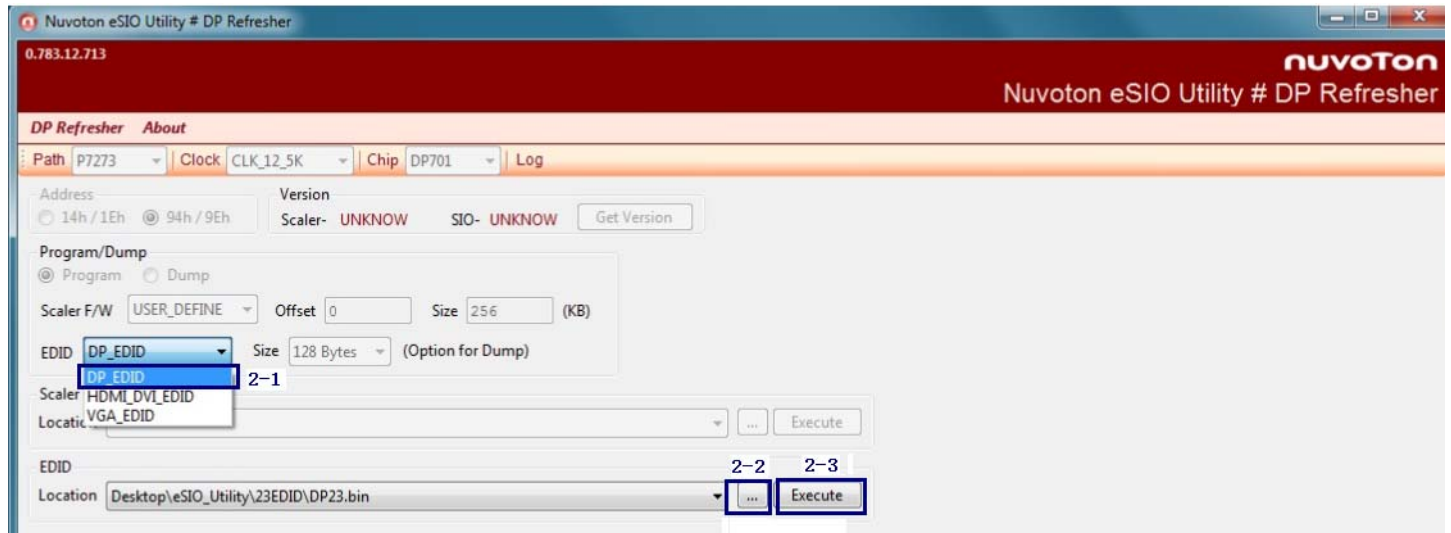

Step 3. Use the same method to flash the HDMI EDID.

- 3-1 Choose HDMI_DVI_EDID option
- 3-2 Choose correct HDMI bin file from your computer
- 3-3 Click the Execute button to flash the EDID.

Step 4. After finishing both DP_EDID and HDMI_EDID, shut down the system and remove the power cord for at least 10 seconds.

Notice: To make sure you definitely have flashed EDID into your system, please enter OS to check resolution.

20" model normal resolution: 1600*900;

23" model normal resolution: 1920*1080.

PS: EDID bin file locates eSIO Utility folder, as follows.

For 20" model, choose 20EDID folder, DP20.bin for DP EDID; HDMI20.bin for HDMI EDID.

For 23" model, choose 23EDID folder, DP23.bin for DP EDID; HDMI23.bin for HDMI EDID.

