

Memory Configurator

Lenovo ThinkStation PX



Table of Contents

Overview	3
Section 1 - Platform Memory Architecture	4
Section 2 – PX Memory Configurations.....	5
Section 3 – PX Memory Layout Visual	7
Section 4 – PX Memory Fill Order	9
Revision History	10



Overview

The purpose of this document is to provide high-level guidance for users to optimally configure their system memory in the ThinkStation PX platform to yield best system performance.

Section 1 - Platform Memory Architecture

The launch of the Intel Eagle Stream platform introduces support for the new DDR5 memory DIMM architecture. DDR5 memory offers a variety of new key features including the ability to reach higher memory bandwidth speeds up to 5600 MT/s using a single DIMM per channel design. The ThinkStation PX platform has been closely designed to take full advantage of this new memory architecture.

Channels	16 channels (8 channels per CPU), 1 DIMM per Channel (DPC)
Slots	16 slots (8 slots per CPU)
Type	DDR5-4800 ECC RDIMM DDR5-4800 ECC 3DS-RDIMM DDR5-5600 ECC RDIMM DDR5-5600 ECC 3DS-RDIMM
Speed	Up to 4800 MT/s ¹ (Intel Sapphire Rapids CPUs) Up to 5600 MT/s ² (Intel Emerald Rapids CPUs)
Qualified DIMM Sizes	16GB, 32GB, 64GB, 128GB RDIMM 128GB, 256GB ³ 3DS-RDIMM
Max System Memory	Up to 4TB maximum

¹ For Intel Sapphire Rapids CPUs, memory bus speed is capable of 4800 MT/s speed but may be limited by CPU memory support capability.
² For Intel Emerald Rapids CPUs, memory bus speed is capable of up to 5600 MT/s speed but may be limited by CPU memory support capability.
³ Limited Availability.

Section 2 – PX Memory Configurations

The Lenovo ThinkStation PX platform is the only new Lenovo dual CPU socket workstation with 16 memory DIMM slots (8 memory DIMM slots per CPU) that can support up to 2TB of system memory capacity. One of the key benefits used in the ThinkStation PX platform is the 8-channel, single DIMM per channel (DPC) design per CPU with higher top supported memory bus speeds of 5600 MT/s.

Intel Sapphire Rapids Processors:

The Lenovo ThinkStation PX supports 16/32/64GB DDR5 ECC RDIMMs and 128GB DDR5 ECC 3DS RDIMM at the maximum memory bus speeds of 4800 MT/s utilizing Intel Sapphire Rapids CPUs.

- 16GB DDR5 ECC RDIMM PC5-4800
- 32GB DDR5 ECC RDIMM PC5-4800
- 64GB DDR5 ECC RDIMM PC5-4800
- 128GB DDR5 ECC 3DS-RDIMM PC5-4800¹
- 256GB DDR5 ECC 3DS-RDIMM PC5-4800²

Intel Emerald Rapids Processors:

The Lenovo ThinkStation PX supports 16/32/64/128GB DDR5 ECC RDIMMs at the maximum memory bus speeds of 5600 MT/s utilizing Intel Emerald Rapids CPUs.

- 16GB DDR5 ECC RDIMM PC5-5600
- 32GB DDR5 ECC RDIMM PC5-5600
- 64GB DDR5 ECC RDIMM PC5-5600¹
- 128GB DDR5 ECC RDIMM PC5-5600¹
- 256GB DDR5 ECC 3DS-RDIMM PC5-5600²

¹ Requires memory DIMM fans (FRU: 5M11H28536).

² Limited availability and requires memory DIMM fans (FRU: 5M11H28536).

The following guidelines are recommended by Lenovo for obtaining the best memory bandwidth from the ThinkStation PX platform.

- In single CPU configurations, only DIMM slots 1-8 can be utilized. For dual CPU configurations, all DIMM slots can be utilized.
- In dual CPU configurations, memory DIMM quantity should be balanced between both CPUs.
- 3DS-RDIMMs cannot be mixed with RDIMMs.
- ECC and non-ECC UDIMMs are not supported.
- DIMMs should be of the same type and capacity.
- Memory DIMM fans (*FRU: 5M11H28536*) are required for 128GB/256GB 4800 MT/s 3DS-RDIMMs, 64GB 5600 MT/s RDIMMs, 128GB 5600 MT/s RDIMMs, and 256GB 5600 MT/s 3DS-RDIMMs.
- Memory speed is dependent on the processor used.
- Lenovo recommends populating every DIMM slot for optimal memory performance.
- See table 1 below for OS disk capacity rules related to the amount of total system memory capacity.

Table 1 - Memory Capacity and Boot Drive

Memory DIMM Quantity	Memory DIMM Size	Bootable Disk
12, 16	64GB DDR5 ECC RDIMM PC5-4800 64GB DDR5 ECC RDIMM PC5-5600	> 512GB M.2 PCIe SSD
6, 8	128GB DDR5 ECC 3DS-RDIMM PC5-4800	> 512GB M.2 PCIe SSD
12, 16	128GB DDR5 ECC 3DS-RDIMM PC5-4800 128GB DDR5 ECC RDIMM PC5-5600	> 1TB M.2 PCIe SSD

Section 3 – PX Memory Layout Visual

The below diagram in Figure 1 shows a high-level visual layout of the memory DIMM slots in the new ThinkStation PX platform.

Figure 1 - PX Motherboard DIMM Layout


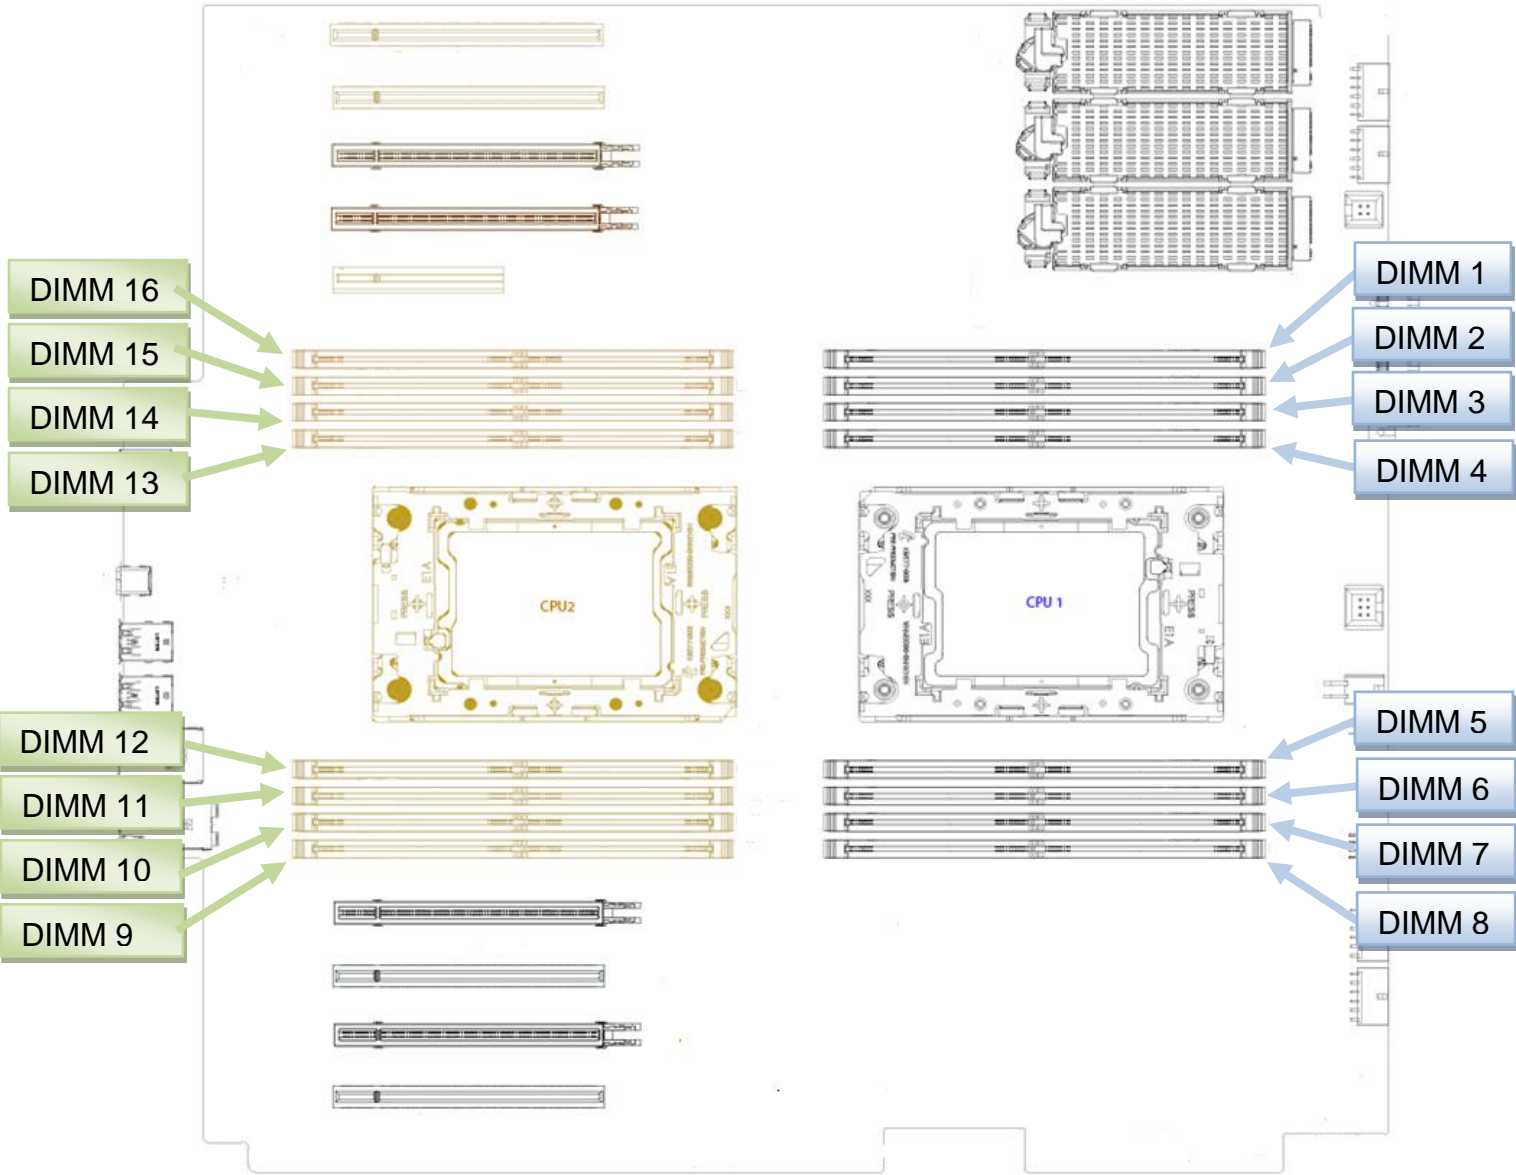



Figure 2 - Memory DIMM Fans

Upper Memory DIMM Fan Header

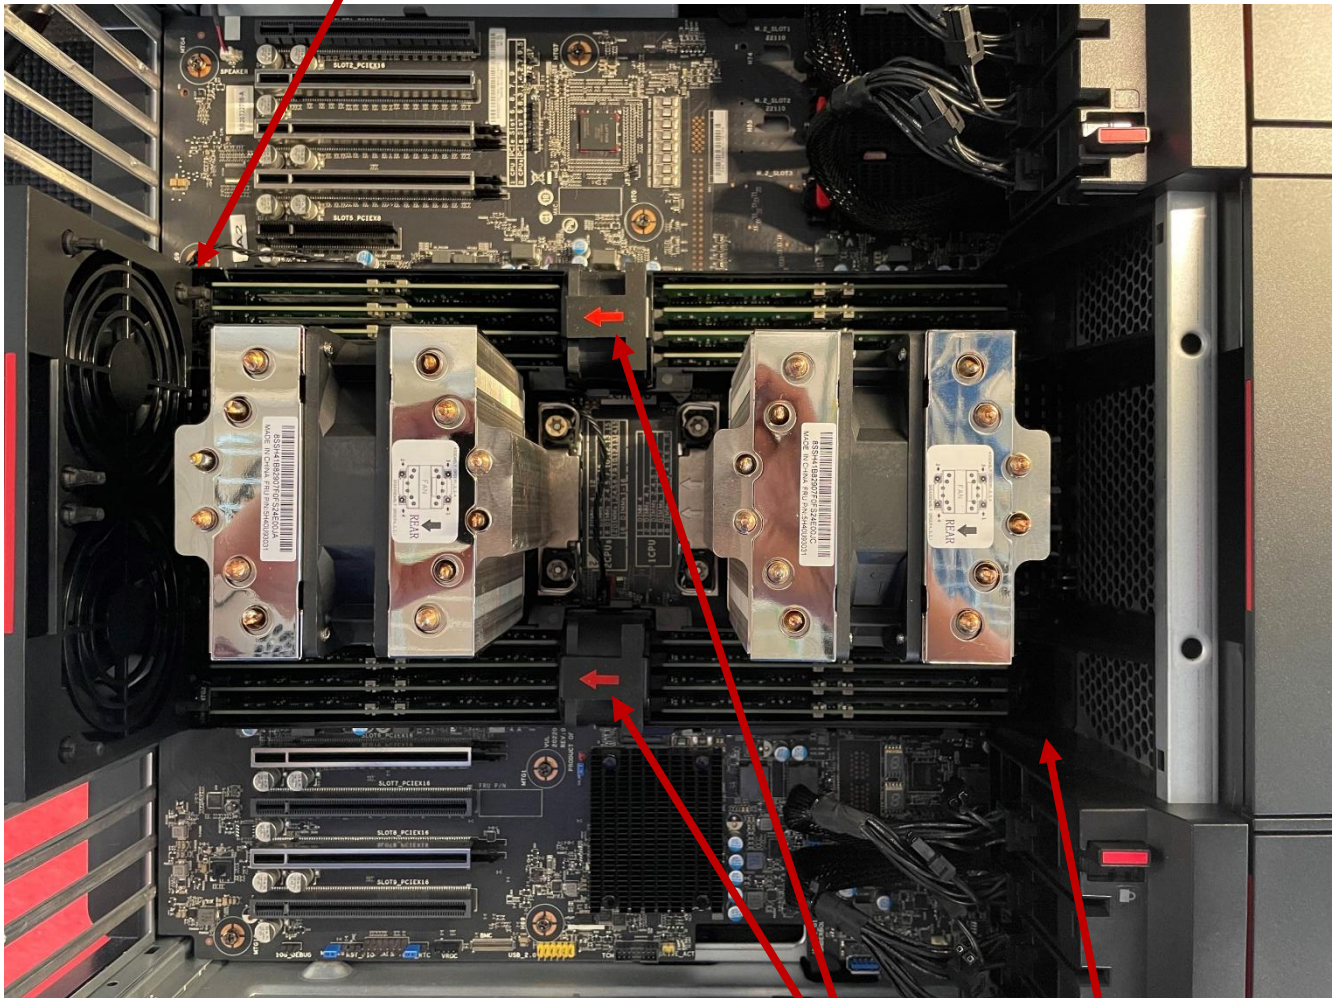

Lower Memory DIMM Fan Header

Memory DIMM Fans

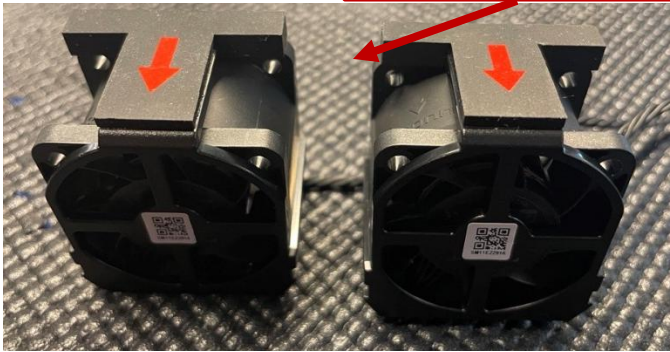

¹ Memory DIMM fans (FRU: 5M11H28536) are required when using 3DS RDIMMs or 64GB/128GB PC5-5600 MT/s RDIMMs.

Section 4 – PX Memory Fill Order

It is important to make sure the proper memory fill order is being utilized to get the best possible memory performance from the new ThinkStation PX workstation. The table in Figure 2 below shows the proper recommended fill order based on the number of memory DIMMs being used.

Table 3 - PX DIMM Slot Fill Order Recommendations

Memory DIMM Quantity	Install Order (1 CPU)	Install Order (2 CPUs)
1 DIMM	DIMM 4	Not Supported ¹
2 DIMMs	DIMM 4, 7	DIMM 4, 12
4 DIMMs	DIMM 2, 4, 5, 7	DIMM 4, 7, 12, 15
6 DIMMs	DIMM 1, 2, 4, 5, 6, 7	Not Supported ¹
8 DIMMs	DIMM 1 – 8	DIMM 2, 4, 5, 7, 10, 12, 13, 15
12 DIMMs	Requires 2 nd CPU	DIMM 1, 2, 4, 5, 6, 7, 9, 10, 12, 13, 14, 15
16 DIMMs	Requires 2 nd CPU	DIMM 1 - 16
All other memory DIMM quantities will still function but is NOT recommended as it results in an unbalanced memory configuration across both CPUs that could result in memory performance degradation.		

¹ The specific memory configuration will function but is NOT recommended as it results in an unbalanced memory configuration across both CPUs that could result in memory performance degradation.

Revision History

Version	Date	Author	Changes/Updates
1.3	3/20/2025	Jason M.	Updated 128GB 5600MHz ECC RDIMMs. Updated 256GB 4800MHz/5600MHz ECC 3DS-RDIMMs. Updated max memory support to 4TB. Cleaned up formatting for DIMM slot fill order table.
1.2	9/13/2024	Jason M.	Updated OS disk capacity rules.
1.1	5/8/2024	Jason M.	Updated for newer generation Intel Emerald Rapids CPUs.
1.0	5/26/2023	Jason M.	Initial launch release.